

Datasheet

Unipolar Pulse Generator HXD 901 – HXD 1401



Cabinet - Front view

The HXD 901 – HXD 1401 is a very convenient solution, which combines high power, easy handling and stable processes. The modularly designed unipolar pulse generators are optimized for reactive coating processes for cathodes up to 4 meters in length. The generator recognizes all relevant process parameters fully automatically and adjusts its arc detection and arc erosion independently. To start the operation or to make a target change, no adjustments have to be done by hand. Powerful water cooling guarantees the highest reliability – even in a non-air-conditioned environment.



Mains Controller MC 8 and

Master Display MD 4

★ Highlights

- ★ Output power 90 kW - 140 kW
- ★ Water cooling
- ★ Magnetic valve control
- ★ Ideal for reactive coating processes for cathodes up to 4 meters length
- ★ Stable processing with arc-critical targets
- ★ Fully automatic arc management (0.3 mJ / kW)
- ★ Automatic power compensation
- ★ Fast discharge with reverse pulse

We are happy to help!

ADL Analoge & Digitale Leistungselektronik GmbH
Bunsenstr  e 30 · D-64293 Darmstadt
www.adl-gmbh.com

Customer Support

Tel. +49 (0) 6151 86072-41 or -42
Fax +49 (0) 6151 86072-75
E-Mail: sales@adl-gmbh.com

Datasheet

Variants

Type	Pulse Output			Order-No.
HXD 901	20 kHz	800 V	90 kW	14Z210
HXD 1051	20 kHz	800 V	105 kW	14Z220
HXD 1201	20 kHz	800 V	120 kW	14Z230
HXD 1401	20 kHz	800 V	140 kW	14Z240

Options and Accessories - detailed Information see Datasheet "Accessories"

Type	Order-No.
Control Interfaces	
AS4 - analogue for U-, I- or P-Regulation	01Y001
AS4F - analogue for U-, I- or P-Regulation, fast Data Transfer	01Y021
AS6 - analogue for U-, I-, P-Limit Specification	01Y061
Profibus DP	01Y160
EtherCAT®	01Y170
RS232/485	01Y181
Control Interfaces	06Y401
Indications	
Master Display MD 4 for up to 4 Units in parallel Operation	50Y261
Miscellaneous	
Supply Connectors on Top	04Y310
Line Voltage 3 x 400 V (default)	10Y022
Line Voltage 3 x 440 V	10Y025
Line Voltage 3 x 480 V	10Y030

Datasheet

Technical Data

	HXD 901	HXD 1051	HXD 1201	HXD 1401
Operational Data				
Output Power	90 kW	105 kW	120 kW	140 kW
Output Voltage	800 V	800 V	800 V	800 V
Output Current	180 A	210 A	240 A	280 A
Control	Current, voltage or power controlled or voltage controlled with ignition automatic			
Operation Mode	External via control interface			
Output Accuracy	+ / - 1 % of nominal value for current, voltage or power			
Pulse Frequency	20 kHz, fixed, external setting from 1 kHz to 40 kHz			
Pulse Off Time	2 μ s, external setting from 2 μ s to 10 μ s (depending on frequency)			
Principle of Operation	Unipolar with reverse voltage impulse			
Arc Suppression	Automatic parameter setting			
Quenching Time	< 2 μ s			
Break Time	2 to 20 μ s (automatic setting)			
Arc Energy	< 0.3 mJ / kW			
Mains Input Connection				
Line Voltage	3 x 400 V, + / - 10 %, 50/60 Hz, PE, (Option: 3 x 440 V or 3 x 480 V)			
Fusing	3 x 160 A	3 x 200 A	3 x 224 A	3 x 250 A
Mains Cable	4 x 50 mm ²	4 x 70 mm ²	4 x 95 mm ²	4 x 95 mm ²
Power Consumption	100 kVA	118 kVA	135 kVA	155 kVA
Pulse-Output				
DC-Cable JZ-600-Y-CY	3 x JZ-600-Y-CY, 2 x 16 mm ²		4 x JZ-600-Y-CY, 2 x 16 mm ²	
Load Inductance	max. 10 μ H			
Cooling System				
Water Cooling	Flow, > 15 l / min, 4 to 8 Bar, < 40° C		Flow, > 20 l / min, 4 to 8 Bar, < 40° C	
Water Connection	1" female thread			
Water Cooling Capacity	4 kW	5 kW	5.5 kW	6.5 kW
Water Outlet	10 mm tube connection			
Compressed Air	4 to 8 bar, 10 mm tube connection			

Datasheet

Technical Data

	HXD 901	HXD 1051	HXD 1201	HXD 1401
Cooling System				
Air Cooling	Built-in fans, maximum ambient temperature 40° C			
Air Cooling Capacity	1.2 kW		1.6 kW	
Fan Noise Emission	$L_{pA} < 70$ dB (A)			
Mechanical Data				
Size (without Plug)	Cabinet, Width: 600 mm, Height: 1800 mm, Depth 830 mm			
Weight (without Packaging)	430 kg		500 kg	

We are happy to help!


ADL Analoge & Digitale Leistungselektronik GmbH
Bunsenstr a e 30 · D-64293 Darmstadt
www.adl-gmbh.com

Customer Support

Tel. +49 (0) 6151 86072-41 or -42
Fax +49 (0) 6151 86072-75
E-Mail: sales@adl-gmbh.com

Datasheet

Dimensions

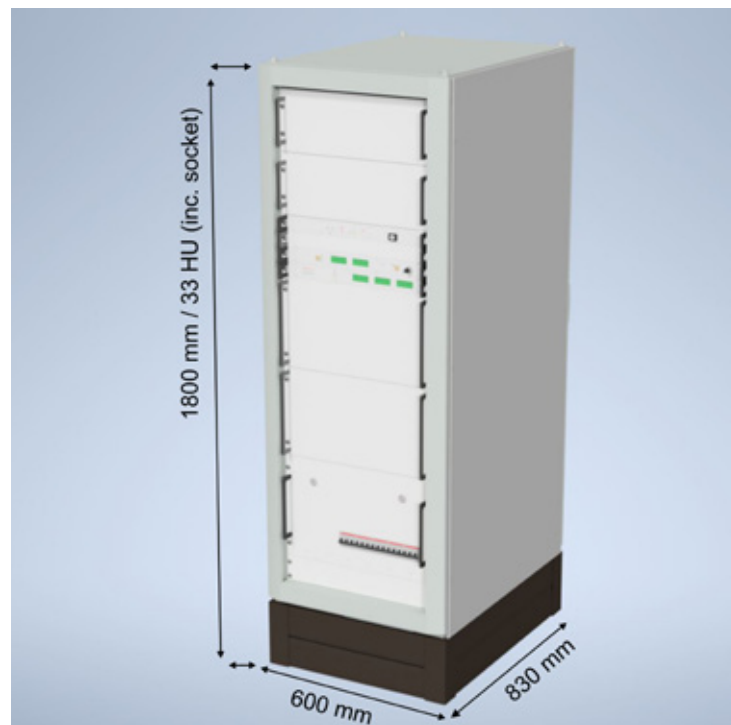

Exemplary illustration for cabinets HX..., front panel and rear view can differ, nevertheless, dimensions are the same.

© 2022 ADL Analoge & Digitale Leistungselektronik GmbH. All rights reserved.

ADL products are constantly improved. ADL therefore reserves the right to make technical changes without prior notice or obligation. To the best of our knowledge, the information contained in this product presentation (short version) is the most accurate available as the date of the current edition. The information is not binding.

We are happy to help!

ADL Analoge & Digitale Leistungselektronik GmbH
Bunsenstr. 30 · D-64293 Darmstadt
www.adl-gmbh.com

Customer Support

Tel. +49 (0) 6151 86072-41 or -42
Fax +49 (0) 6151 86072-75
E-Mail: sales@adl-gmbh.com